


MAXI 10.5 mm tongue/ groove

Technical information:

| | | |
|--|---|------------------------|
| Produced according to: | European parquet norm EN 13489 - 2002 | |
| Dimension: | 10.5 x 100 x 833 mm | |
| Toplayer: | about 3.5 mm | |
| Construction: | 2-layer construction; Hardwood top layer, Bottom layer made of spruce Top layer: approx. 3.5 mm Bottom layer: 7.0 mm | |
| Boards/ m² per carton: | 20/ 1.667 | |
| Cartons/ m² per pallet: | 50/ 83.35 | |
| Divided strips per carton/ minimum length (mm): | 1/ 416 | |
| Weight per carton/ pallet in kg: | 9.35/ 467.5 | |
| Floor heating systems: | Very well suitable | |
| Fire behaviour ¹⁾: | Cfl-s1 depending on wood species and surface treatment. | |
| Content of formaldehyde ²⁾: | E1 | |
| Content of pentachlorophenol (PCP) ²⁾: | not detectable | |
| Density kg/ m³ ²⁾: | about 600 | |
| Antislip performance: | Live Satin | USRV 25 ²⁾ |
| | Live Matt | USRV 43 ²⁾ |
| | Live Natural | USRV 74 ²⁾ |
| Abrasion resistance: | Live Satin | 70/ 1100 ³⁾ |
| | Live Satin | 100 ⁴⁾ |
| Thermal conductivity ²⁾: | 0.15 W/ mK | |
| Areal thermal resistance ⁵⁾: | 0.07 m ² K/ W | |

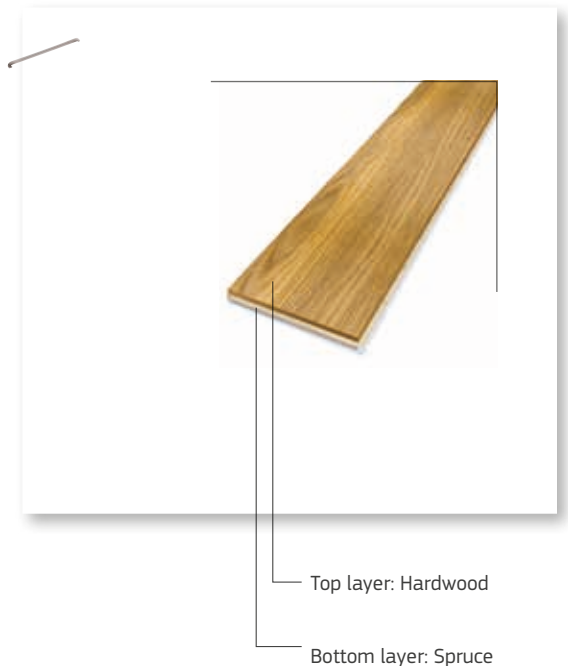

DOP 4658-1.1-07.2013



Emissionsgeprüftes
Bauprodukt nach
DIBt-Grundsätzen.

¹⁾ according to DIN EN 13501-1, ²⁾ according to DIN 14342, ³⁾ according to ENV 13696, ⁴⁾ according to DIN 68861, ⁵⁾ according to EN 12524